


Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte tier den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

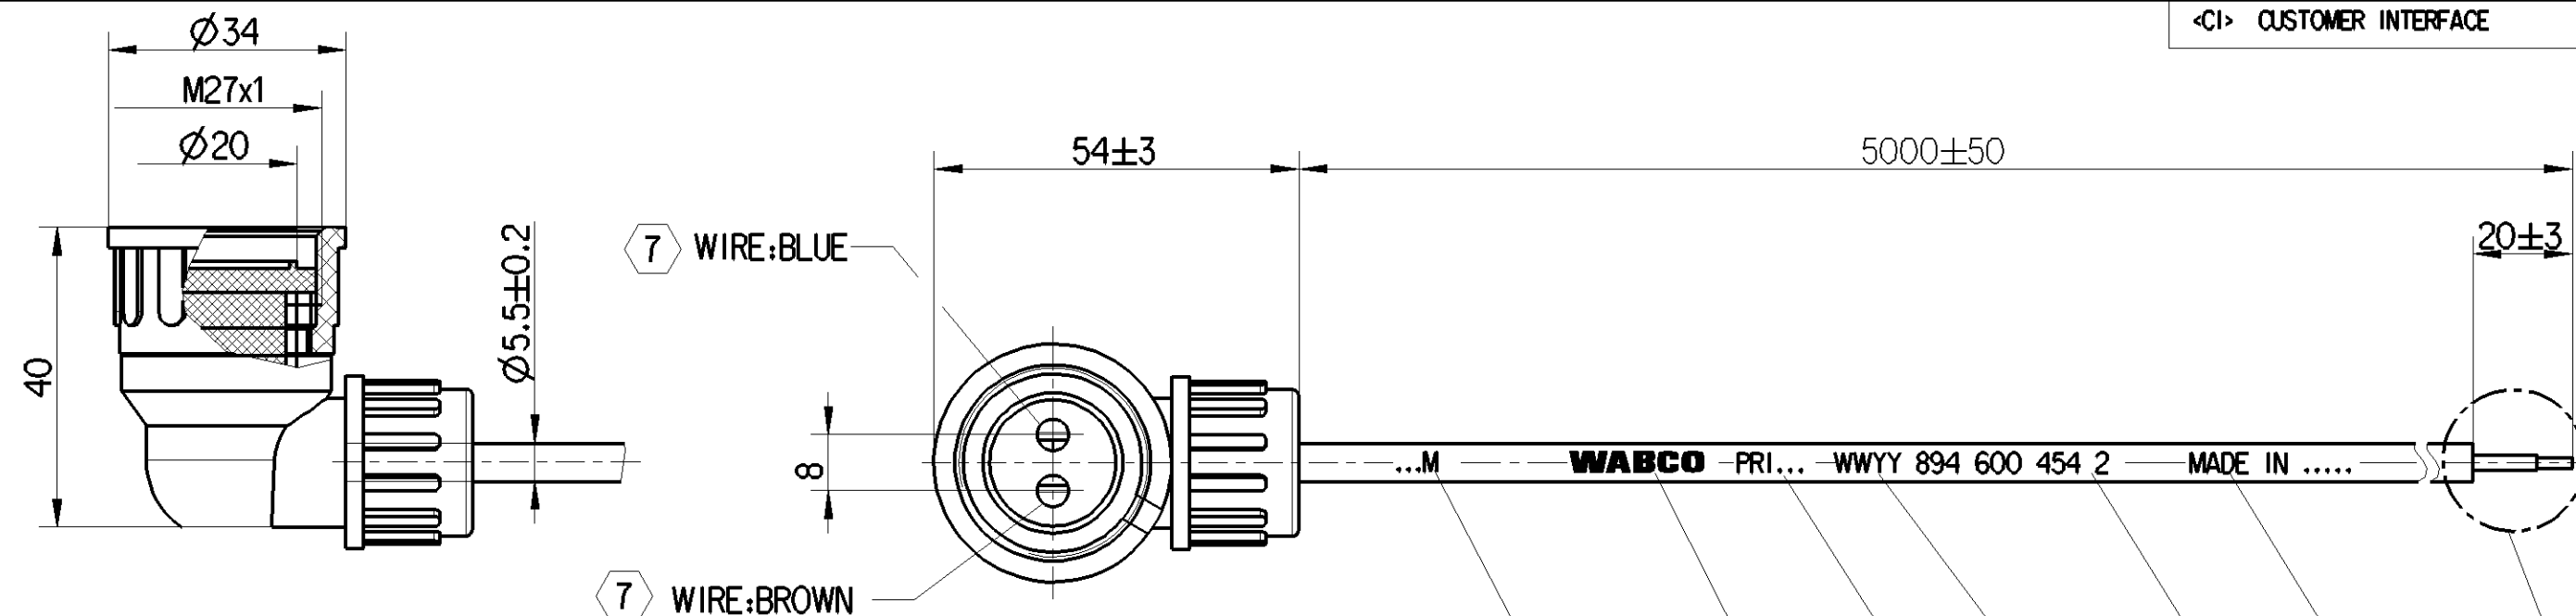

- 1 CABLE LENGTH
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 2 WABCO LOGO: WABCO-16-JED-369
- 3 MANUFACTURER IDENTIFICATION
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 4 DATE OF MANUFACTURE ACC. TO JED-226-3.1
- 5 WABCO IDENTIFICATION NUMBER 894 600 454 2
- 6 IDENTIFICATION OF COUNTRY OF ORIGIN
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG):
IP68 / ISO 20653

THERMAL RANGE OF APPLICATION : -40°C ... +80°C
- E CABLE COMPLY WITH UN/ECE R118
- 7 CONTACTS' SURFACE PROTECTION : Ag

FOR CONTACT PIN : Ø4
- E CABLE : PVC / 2x1mm²

MOUNTED CABLE RESISTANT TO:
AIR, WATER, MINERAL OIL, DIESELOIL, SALTSpray
- 8 CABLE SEAL AGAINST INGRESS WATER REQUIRED

General Specification: JED-334-1 , Size ISO 14405 LP										Copyright WABCO®				WABCO CABLE WITH SOCKET																																
Further Technical Data:										Date		Signature																																		
Doc. Code:					Sheet: To					Drawn																																				
General Tolerances JED-261										2021-03-11		Selkowicz																																		
Range of Nominal Dimensions (± mm) <table><tr><td></td><td>> 50</td><td>> 180</td><td>> 400</td><td rowspan="4"></td></tr><tr><td>Class 1)</td><td>≤ 50</td><td>≤ 180</td><td>≤ 400</td></tr><tr><td>Fine</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td>X 1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td><td>±3°</td></tr></table>											> 50	> 180	> 400								Class 1)	≤ 50	≤ 180	≤ 400	Fine	0.5	1.0	1.5	2.0	Medium	X 1.0	2.0	3.0	4.0	Coarse	2.0	3.5	5.0	6.5	±3°	Checked		2021-03-15		Grychowicz	
											> 50	> 180	> 400																																	
Class 1)	≤ 50	≤ 180	≤ 400																																											
Fine	0.5	1.0	1.5	2.0																																										
Medium	X 1.0	2.0	3.0	4.0																																										
Coarse	2.0	3.5	5.0	6.5	±3°																																									
										Expert																																				
										Overhage																																				
										Mass		Scale		Material No.						Date of first issue: 2021-03-11																										
										0.35 KG		1:1		894 600 454 2						Doc.Code	Language	Sheet																								
										Size		CAD System								005	EN	1/1																								
Tapped Holes acc.										A 3		CREO				ECN-No.		Revision		Techn. Resp.		Replacement for																								
1) Tolerance Class Applied Crossmarked																506832		2x E		6930_EM																										

	1. <i>Chlorophyll a</i> (mg/g) 2. <i>Chlorophyll b</i> (mg/g) 3. <i>Chlorophyll a + b</i> (mg/g) 4. <i>Carotenoids</i> (mg/g) 5. <i>Total carotenoids</i> (mg/g) 6. <i>Protein</i> (mg/g) 7. <i>Starch</i> (mg/g) 8. <i>Cellulose</i> (mg/g) 9. <i>Hemicellulose</i> (mg/g) 10. <i>Lignin</i> (mg/g) 11. <i>Phenolic compounds</i> (mg/g) 12. <i>Flavonoids</i> (mg/g) 13. <i>Anthocyanins</i> (mg/g) 14. <i>Alkaloids</i> (mg/g) 15. <i>Saponins</i> (mg/g) 16. <i>Glycosides</i> (mg/g) 17. <i>Terpenoids</i> (mg/g) 18. <i>Phenols</i> (mg/g) 19. <i>Aldehydes</i> (mg/g) 20. <i>Ketones</i> (mg/g) 21. <i>Alcohols</i> (mg/g) 22. <i>Acids</i> (mg/g) 23. <i>Salts</i> (mg/g) 24. <i>Other</i> (mg/g)
5	